


LAYOUT FOR STANDARD PATIO DOOR REPLACEMENT UNITS

GLASS SIZE	☉ BAY WIDTH +/- 1/4"	☉ BAY HEIGHT +/- 1/4"	CLEAR GLASS OPENING (WxH)	SQ. FT.
28" x 76"	29 1/2"	77 1/2"	26 3/8" x 74 3/8"	13.62
34" x 76"	35 1/2"	77 1/2"	32 3/8" x 74 3/8"	16.72
46" x 76"	47 1/2"	77 1/2"	44 3/8" x 74 3/8"	22.92
34" x 90"	35 1/2"	91 1/2"	32 3/8" x 88 3/8"	19.87
46" x 90"	47 1/2"	91 1/2"	44 3/8" x 88 3/8"	27.23
CUSTOM SIZE	Width + 1 1/2"	Height + 1 1/2"		

*NOT AVAILABLE IN ALL PARTS OF THE COUNTRY.

1. OUTSIDE TO OUTSIDE DIMENSIONS = NUMBER OF BAYS x ☉ BAY LENGTH + 2 5/8".

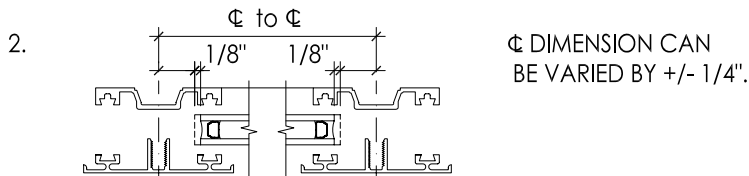

3. RECOMMENDED SCREWS: #10 x 2" HEX HEAD @ 14" - 18" O.C. & 2" FROM EACH END FOR BASE, 1" FROM EACH END FOR CAP.
4. THICKNESS = 1 5/8" WITH 5/8" GLASS (BOTTOM OF BASE TO TOP OF CAP)
2" WITH 1" GLASS
5. TWO EPDM SETTING BLOCKS & T-BARS @ 1/4 POINTS OF GLASS WIDTH IN FROM EACH SIDE, PLACED AT BOTTOM OF GLASS.
6. STANDARD FINISHES - BRONZE & WHITE.
7. MINIMUM RECOMMENDED SLOPE - 3:12.
8. STANDARD LENGTHS: 16'-3" & 20'-3", HALF-LENGTHS AVAILABLE)

**Sure Seal
Glazing System**

Applications guidelines

© 2006 U.S. Sky

GENERAL NOTES

4